Jada.	Final Output Approval (Hong Kong Office use only)
BTM LOPRO Description: RC	Art Dept Approved Date of approval Engineer Approved Date of approval
Instruction Shee Scale: 7.5" Material Code: F83176-0000-ISH-EN08	Approved
Date: Dec, 13, 2011 Prepared By: Lefang	

Ja	dą.
<u> </u>	

BIGTIME

RADIO CONTROL

Keep these instructions for future reference: they contain important information.

IMPORTANT: Please read all "Consumer Information" before operating your vehicle.

ADULT SUPERVISION REQUIRED.

Surfaces may become hot and cause burns if electronics get wet. Do not operate vehicle through water or snow.

Consumer Information:

Note to Adults: to ensure that the child's play is both safe and fun, please review all operating instructions and safety rules with your child.

CONTENTS

Vehicle

Transmitter Controller

Safety Tips

- NEVER drive your vehicle on streets! They're for real cars!
- DO NOT pick up vehicle while in motion.
- · Avoid collisions with wall or hard surfaces
- Keep fingers, hair and loose clothing away from tires and the wheel hubs while the vehicle is switched ON.
- · Adult supervision is recommended when this vehicle is being operated.
- To avoid accidental operation, remove all batteries when not in use.
- · Be sure to rest your vehicle for at least 5 minutes after every 15 minutes of operation.
- · Please avoid unintended play with electric wire (soft antenna), as it may defect product or result in strangulation.

BEFORE BATTERY INSTALLATION

Your new R/C is designed to work with standard 3 (three) "AA" batteries, sold separately.

Controller is designed to work with a 9-volt battery, sold separately.

INSTALLING BATTERIES IN THE R/C

- 3 (three) "AA" batteries (Not included)
 - 1. Push the ON/OFF to "OFF" position on vehicle.
 - 2. Using a Phillips screwdriver (not included), to remove the battery compartment door underneath the vehicle. (See diagram 1)
 - 3. Remove the used batteries (if any).

- 4. Insert the 3 "AA" batteries, with polarity (+/-) as shown inside battery compartment.
- 5. Replace the battery compartment door and use Phillips screwdriver to lock the compartment door.

INSTALLING CONTROLLER - 9 VOLT BATTERY

1 (one) 9V battery (not included)

- 1. Open the battery cover as shown (See Diagram 2)
- 2. Remove the used batteries (if any).
- 3. Install one 9V battery with polarity (+/-) as shown inside battery compartment.
- 4. Replace battery cover.

Battery Safety Information

- · Insure that battery polarity is correct.
- Use only batteries of the type recommended (or equivalent).
- Do not mix old and new batteries.
- · Do not mix alkaline, standard (carbon-zinc), or rechargeable (nickel-cadmium) batteries.
- Remove used-up batteries immediately. Remove batteries if vehicle will not be used for a long period of time to prevent possible leakage.
- · Do not recharge non-rechargeable batteries.
- · Do not short-circuit terminals.
- · Dispose of batteries safely. Do not dispose of batteries (or products containing non-replaceable batteries) in fire, as batteries may explode or leak.

QUICK TIPS

- · When your vehicle starts to lose power, it may lose functions or performance. It's time for fresh batteries (or a recharge). Your vehicle's running time may change depending on your driving style.
- Radio interference can make vour vehicle run badly. Interference can be caused by other R/C vehicles running on the same frequency; electrical wires, large buildings; or CB radios. Try to stay away from these!
- Point your transmitter controller antenna up not down toward your vehicle. If your vehicle gets too far away, it won't work properly.
- Don't drive your vehicle in sand or through water or snow.
- Don't store your vehicle near heat or in direct sunlight. Always turn switches OFF and remove all batteries for storage.
- · If the vehicle resets automatically, the batteries are weak and need to be changed.


Cleaning instruction:


To clean, wipe excess dirt from toy. Remove batteries first. Wipe toy clean with wet cloth using plain water. Wipe dry. DO NOT IMMERSE IN WATER and DO NOT CLEAN VEHICLE WITH ANY CHEMICALS. Let the toy completely dry up before putting batteries back into clean, dry battery compartment.

FRONT **Steering Dial** 0 0 TO ADJUST STEERING ALIGNMENT Adjust the steering alignment lever on 3 x AA Batteries the underside of the vehicle when the vehicle doesn't run straight forward. steering alignment lever To replace batteries remove screw on battery cover as shown in illustration and replace (DIAGRAM I) REAR



F83176-0000-ISH-EN05A

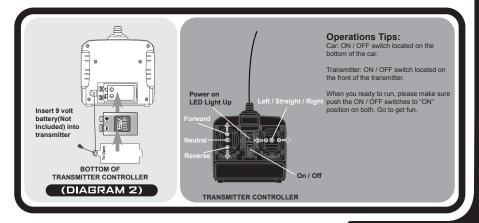





BIGTIME MUSCLE is a registered trademark of Jada Toys, Inc.

Jada oval mark is a registered trademark of Jada Toys, Inc.

©2012 JADA TOYS, INC. CITY OF INDUSTRY, CA 91748